




Installation Instruction

Single Handle Pull-Out Kitchen Faucet

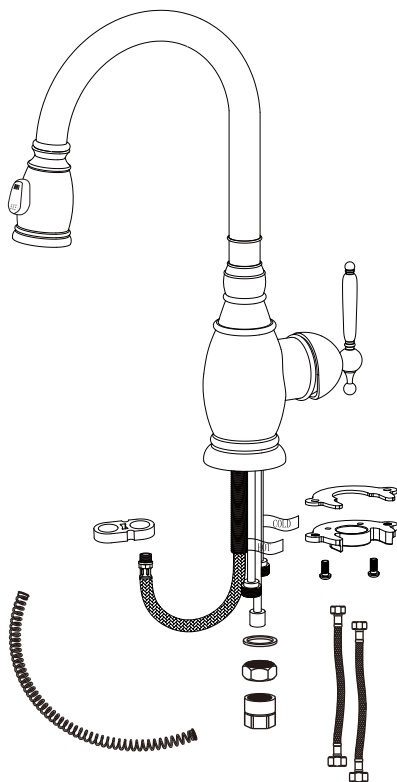

Model No.: SB-6060

Tools You Will Need




Adjustable wrench



Phillips screwdriver




Hose wrench
(supplied)



Spanner for mounting nut
(supplied)

Replacement Parts


Keep this manual for ordering replacement parts.

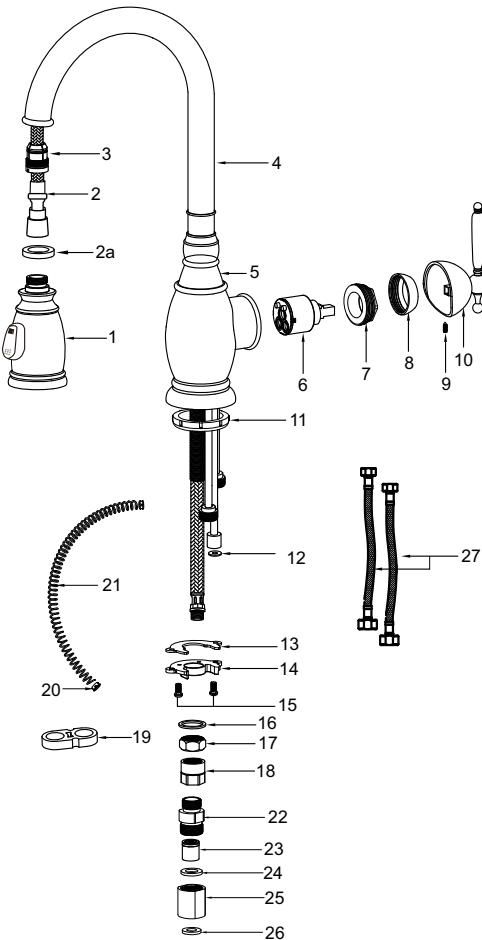


- 1. Sprayer head**
- 2. Swivel Hose**
- 2a. Hose Washer**
- 3. Neck Insert**
- 4. Neck**
- 5. Faucet Body**
- 6. Cartridge**
- 7. Cartridge Nut**
- 8. Cartridge Cover**
- 9. Handle Set Screw**
- 10. Control Handle**
- 11. Bottom Gasket**
- 12. Hose Tub Washer**
- 13. Mounting Rubber**
- 14. Mounting Bracket**
- 15. Set Screws**
- 16. Mounting Washer**
- 17. Mounting Nut**
- 18. Hose Protector**
- 19. Spring Holder**
- 20. Friction Ring**
- 21. Spring**
- 22. Sleeve Nut**
- 23. Check Valve**
- 24. Flat Gasket**
- 25. Sleeve**
- 26. Flat Gasket**
- 27. Hot & Cold Waterlines**

**SB-6060 Hamilton
Solid Stainless Steel Pull-Out Faucet**


Product Dimension Drawing

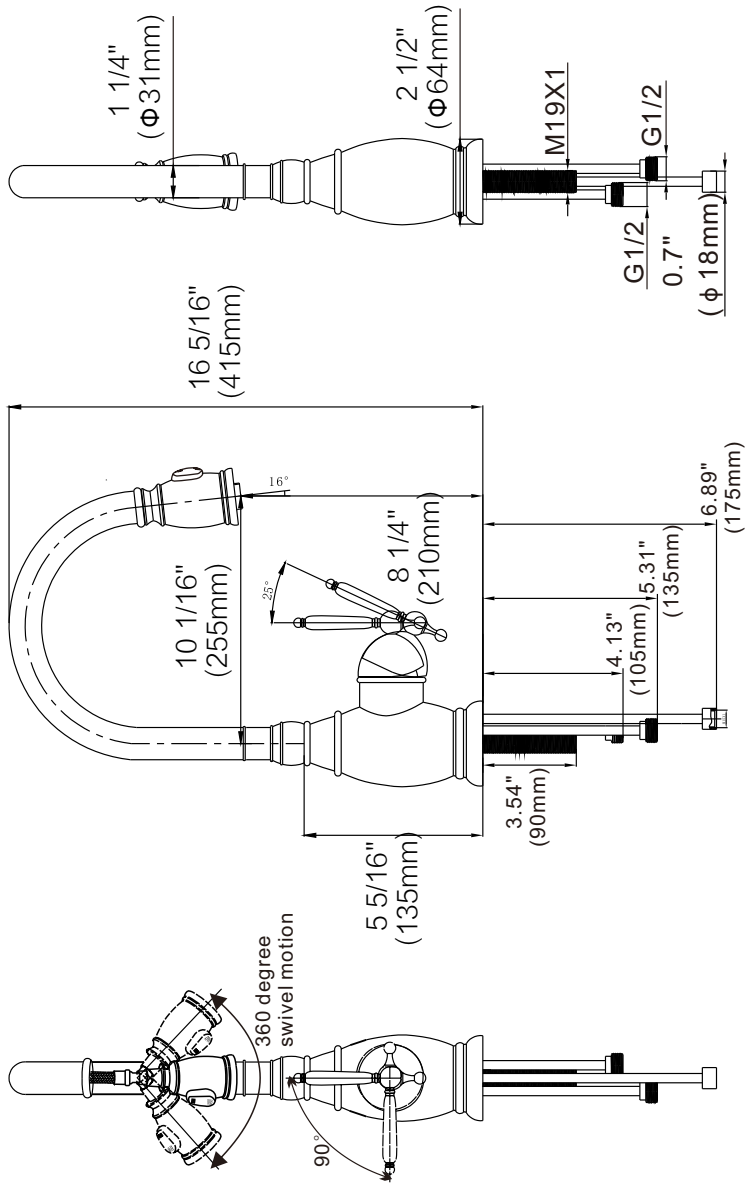


Faucet Installation Procedures

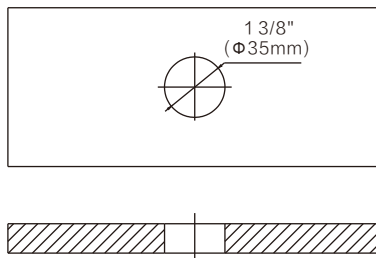


Step①

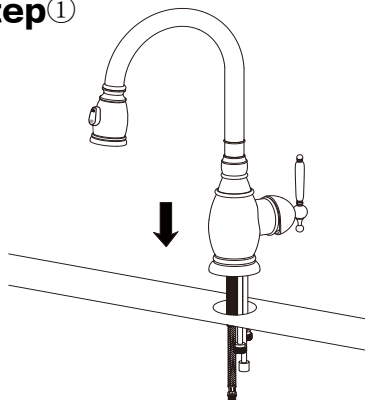


Step②

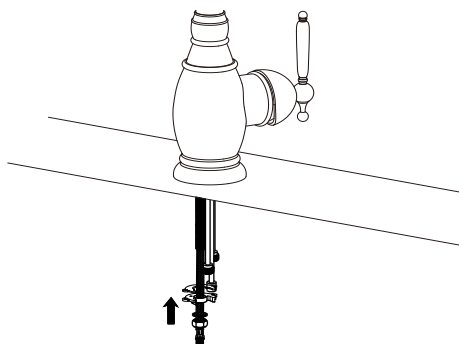


Step③

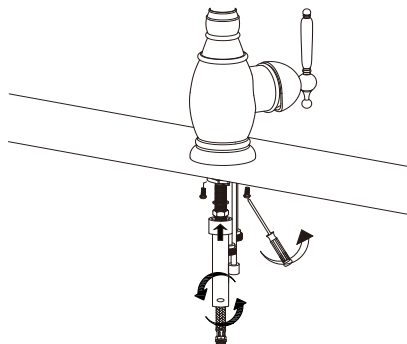


Step④

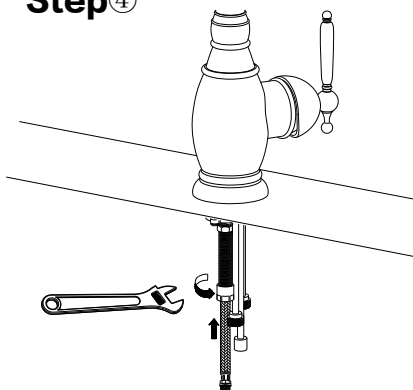


Step⑤

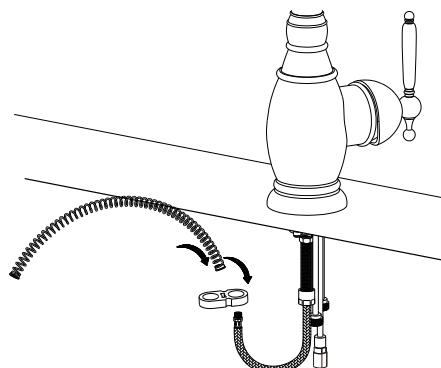

Step ⑥

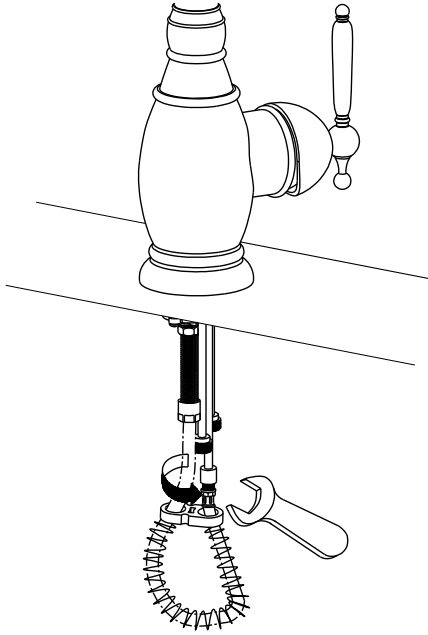



Step ⑦

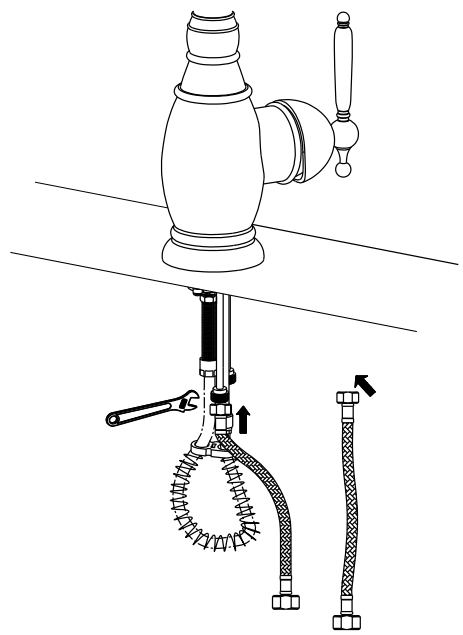

Step ⑧

Caution!!


Flush construction debris out of water valves and pipes BEFORE connecting water lines.

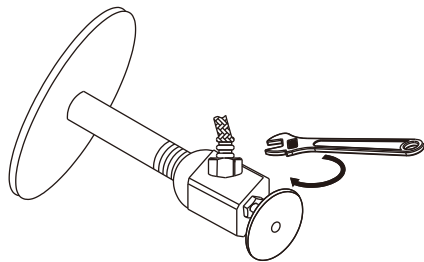


Step⑨

Caution!!

Do not lose hose washer!
Remove head and final flush cartridge,
faucet body and hose.

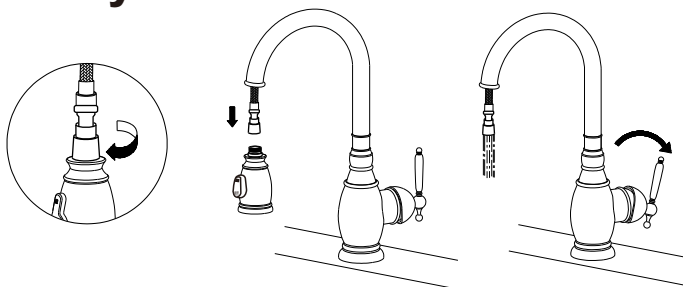

Step⑩

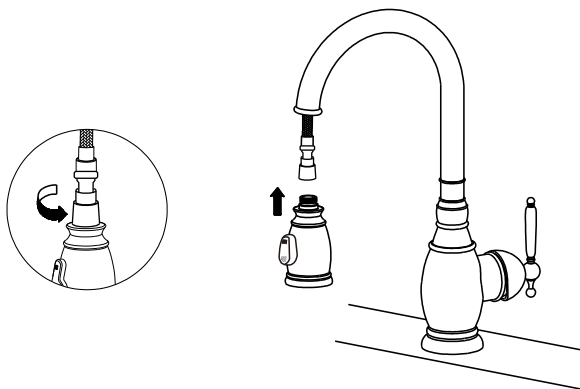

Step⑪

